

**Preliminary**

# Vertex N

MONOFACIAL DUAL GLASS MODULE

PRODUCT: TSM-NEG18R.28

PRODUCT RANGE: 475-505W

**505W**

MAXIMUM POWER OUTPUT

**0~+5W**

POSITIVE POWER TOLERANCE

**22.7%**

MAXIMUM EFFICIENCY



### High customer value

- Lower LCOE (levelized cost of energy), reduced BOS (balance of system) cost, shorter payback time
- Guaranteed first year and annual degradation
- High module power, high string power and low voltage design



### High power up to 505W

- Up to 22.7% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection




### Dual-glass design, high reliability

- Less prone to micro-cracks and scratches on the back during installation
- Applicable in harsh environments such as salt, ammonia, sand, high temperature and high humidity areas with excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load
- Easy to handle and install on roofs with excellent size and light weight




### Ultra-low degradation, longer warranty, higher output

- Extremely low 1% first year degradation and 0.4% annual power attenuation
- Up to 15 years product warranty and 30 years power warranty
- Lower temperature coefficient (-0.30%) and operating temperature

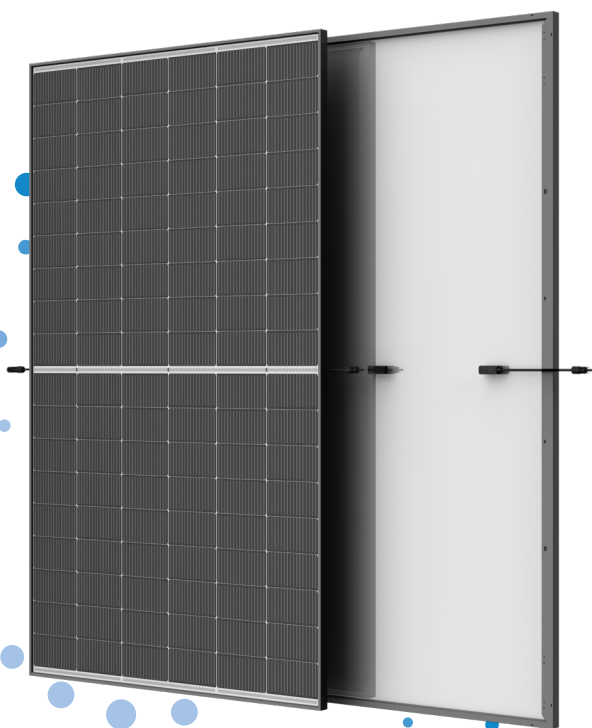

### Trina Solar's Vertex Monofacial Dual Glass Performance Warranty

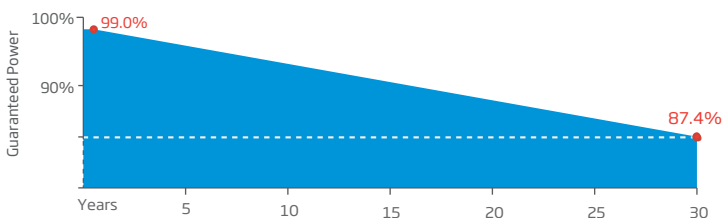

### Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716

ISO 9001: Quality Management System


ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification


ISO45001: Occupational Health and Safety Management System




**DIMENSIONS OF PV MODULE(mm)**

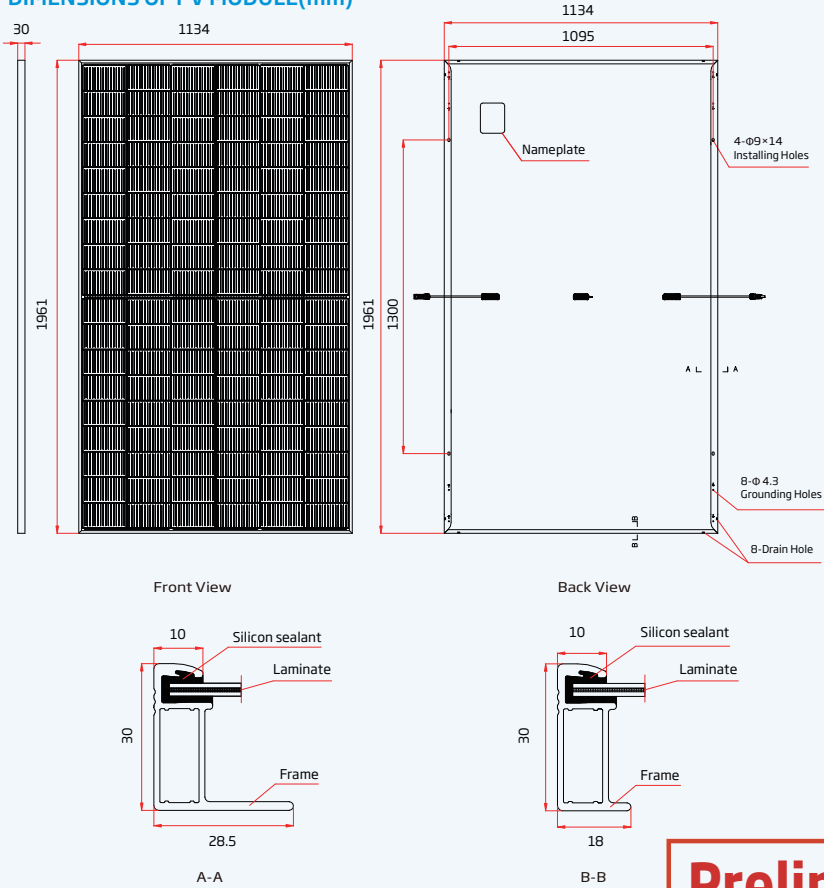

**I-V CURVES OF PV MODULE (490W)**

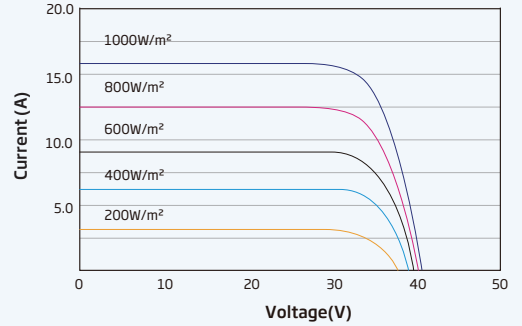

**P-V CURVES OF PV MODULE (490W)**

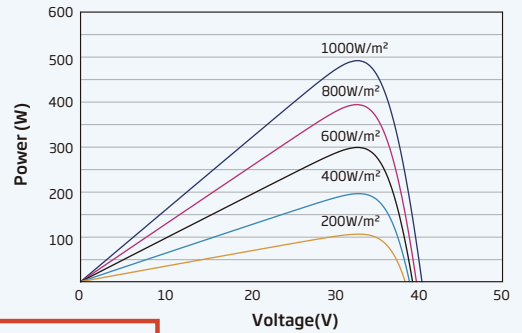

**Preliminary**

**ELECTRICAL DATA (STC)**

Peak Power Watts-P <sub>MAX</sub> (Wp)*	475	480	485	490	495	500	505
Power Tolerance-P <sub>MAX</sub> (W)	0 ~ +5						
Maximum Power Voltage-V <sub>MPP</sub> (V)	32.3	32.5	32.7	32.9	33.1	33.3	33.5
Maximum Power Current-I <sub>MPP</sub> (A)	14.72	14.77	14.84	14.91	14.97	15.03	15.09
Open Circuit Voltage-V <sub>OC</sub> (V)	39.0	39.2	39.4	39.6	39.8	40.0	40.3
Short Circuit Current-I <sub>SC</sub> (A)	15.68	15.72	15.76	15.80	15.83	15.86	15.90
Module Efficiency η <sub>m</sub> (%)	21.4	21.6	21.8	22.0	22.3	22.5	22.7

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

**ELECTRICAL DATA (NOCT)**

Maximum Power-P <sub>MAX</sub> (Wp)	363	367	370	374	378	381	385
Maximum Power Voltage-V <sub>MPP</sub> (V)	30.4	30.6	30.8	31.0	31.3	31.5	31.7
Maximum Power Current-I <sub>MPP</sub> (A)	11.94	11.98	12.02	12.06	12.08	12.11	12.15
Open Circuit Voltage-V <sub>OC</sub> (V)	36.9	37.1	37.3	37.5	37.7	38.0	38.2
Short Circuit Current-I <sub>SC</sub> (A)	12.64	12.67	12.70	12.74	12.76	12.78	12.82

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**MECHANICAL DATA**

Solar Cells	Monocrystalline
No. of cells	108 cells
Module Dimensions	1961×1134×30mm (77.20×44.65×1.18 inches)
Weight	23.5kg (51.8 lb)
Front Glass	1.6mm High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	1.6mm (0.06 inches), Heat Strengthened Glass
Frame	30mm(0.06 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ) Portrait: 280/350 mm(11.02/13.78 inches) Length can be customized
Connector	MC4 EVO2 / TS4 Plus / TS4*

\*Please refer to regional datasheet for specified connector.

**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.30%/°C
Temperature Coefficient of V <sub>OC</sub>	-0.24%/°C
Temperature Coefficient of I <sub>SC</sub>	0.04%/°C

**MAXIMUM RATINGS**

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	30A

**WARRANTY**

15 year Product Workmanship Warranty  
30 year Power Warranty  
1% first year degradation  
0.4% Annual Power Attenuation

(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box: 36 pieces  
Modules per 40' container: 864 pieces